



**YORK LXL
VERTICAL
ECONOMIZERS
I/O/M MANUAL**

Table of Contents

York Economizer Description.....	3
LXL Vertical Submittal.....	4
LXL 2 to 5 Ton Unit Vertical Install.....	5
Additional Install Notes.....	9

**For information on iAIRE's Economizer Controls Package,
please refer to IOM-0014**

York Economizer Description

PLEASE NOTE: Our economizer is a low leak, field installed economizer with the iAIRE patented controls packages and actuator, allowing you to reduce the amount of outside air needed from your rooftop HVAC system by up to 2/3 and will improve indoor air quality.

This reduction in system operation creates on-going utility savings. Payback on capital equipment costs with an iAIRE economizer can be realized in fewer than three years. These packages are designed to work directly on existing rooftop HVAC systems.

These economizers are all low leak and meet the IECC 2015 requirement and are Title 24 compliant by meeting section 120.2(i) for the required controls and the efficiency requirements in 140.4(e).

Unit to RTU Conversion

LXL

P***B ALL MODELS

Part Number

EC - 1 - 2 3 4 5 - 6

type

EC - ECONOMIZER

unit/ton (1)

26	6075	CHAS12	A-BOX	FND35	PREC810	AFF	SCL34
712	100	CHAS34	B-BOX	PACK13	VOY12	LXS	SCLHE12
1525	125	CHAS5	C-BOX	PREC35	VOY12HE	LXL	SCLHE34
3050	150	CHAS69	D-BOX	PREC48	VOY1525HE	SCS12	PRED
			E-BOX	PREC610		SCS34	PREDS
			F-BOX			SCSHE12	SL
						SCSHE34	SLL
						SCL12	SLU
							York

Controls Only

Carrier

Lennox

Trane

York

configuration (2)

0 - NO ECON
C - CONVERTIBLE
H - HORIZONTAL
V - VERTICAL

actuator (3)

0 - NO ACTUATOR
A - 20 IN-LB
B - 62 IN-LB
C - 160 IN-LB

controls (4)

0 - ECON ONLY
A - IAQ
B - IAQ (NO IONIZATION)
D - DCV

power exhaust (5)

0 - NO POWER EXHAUST
A - 208/230V 1Φ FIXED PE
B - 208/230V 3Φ FIXED PE
C - 460V 3Φ FIXED PE

options (6)

0 - NONE
B - HUMIDITY
C - BACNET
D - BLDG PRESSURE*
R - RTU OPEN
U - ULTRA LOW LEAK


Note: By adding option "D" any powered exhaust will be modulating.

SUB-0027

iAIRE LLC | 2100 Consulate Drive Suite 102, Orlando, FL 32837
www.myultrapure.com | Toll Free 844-348-9168

PD 09/25/21 V.01.00

LXL Vertical Submittal

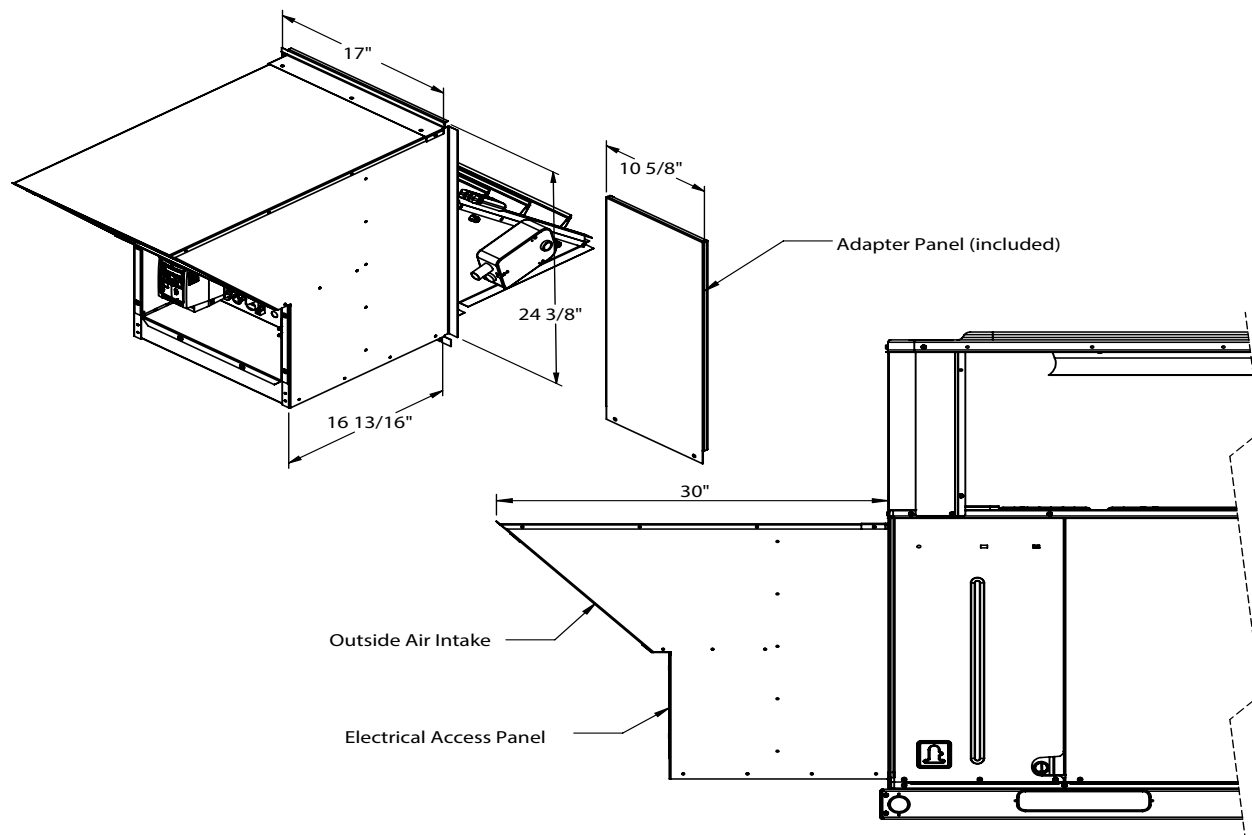

Electrical Data

PART #	WEIGHT
EC-LXL-VBA0-*	50 lbs.

PART	AMPS	PART	AMPS	TOTAL
ACTUATOR	.29A	CONTROLS	.27A	.56A

*OPTIONS
0 - No Options
B - Humidity/Enthalpic
C - BACNet

Features

- **iAIRE Patented Controls Scheme Included**
- Low Leak Damper Included
- VOC, CO2 and Ionization included
- Heavy Gauge Galvanized Steel Construction
- American Sterling Grey Paint Finish
- One Piece Assembly
- Gear Driven Dampers
- Uses HVAC Unit Filter Access Door
- Capable of Relieving up to 100% of the Outside Air Intake

Economizers with Indoor Air Quality control are Title 24 compliant by meeting section 120.2(i) for the required controls and the efficiency requirements in 140.4(e). They also meet California ozone emissions requirements to be CARB certified.

LXL 2 to 5 Ton Units- Vertical Install

PLEASE NOTE: This instruction provides the necessary information to properly field- install the economizer assembly on 2 ton through 5 ton single package rooftop units.

The damper accessory provides the return air and outdoor air dampers and actuator for the economizer operations. Contained in this kit are all rain hood components.

PLEASE NOTE: If the unit is 208/230V, single phase, power supply, the installed 40VA transformer needs/must be replaced with a 75VA transformer. All other factory units have the 75VA transformer installed standard.

Before Starting Installation

Warning

Shut power to unit prior to any work being done. Personal injury or death could result.


Only qualified HVAC service personnel should install, troubleshoot, repair or service HVAC and related HVAC equipment.

Installation of Cooling Only & Heat Pumps


1. Disconnect the power supply.
2. Remove the filter access door. (ILL. 2)
3. Remove screws in immediate area on mid pan. (ILL. 3)
4. Remove top plate of economizer assembly. (ILL. 4)
5. Before installing economizer into the unit, make sure the duct cover has been removed. (ILL.5) Place the economizer into the unit and support the economizer from underneath until step 6 is complete. Place gasket as needed.
6. Replace top panel of economizer assembly, with front flange under mid pan and place screws back into place. (ILL. 6)
 - 6a. **Only for 4 & 5 Ton Units-** Use the side door provided to close gap between economizer and compressor panel.
7. Replace screws in mid pan to secure economizer to unit.
8. Drill a 1/2" hole in compressor barrier as needed to route wiring to main control board and sensors. Tightly seal opening around wires.
9. Route wiring through existing openings to control panel.

PARTS INCLUDED	QTY.
#10 x 1/2 Sheet Metal Screw	12
Terminal Block with Wire Harness	1
Tie Wraps	5
Gasket 1/8" x 1/2"	6 ft.
Gasket 3/4"x 1-1/4"	7 ft.
Discharge Air Sensor	1

ILL. 1

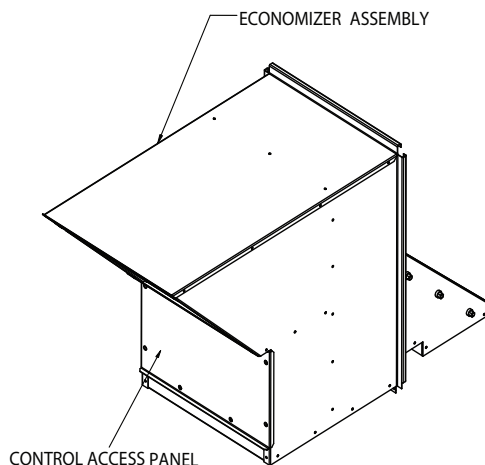

ILL. 2

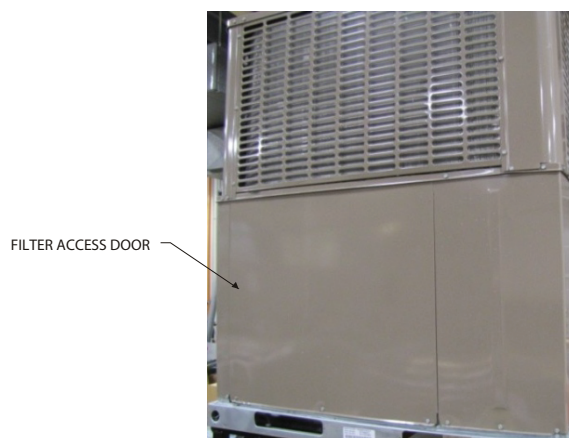

LXL 2 to 5 Ton Units- Vertical Install (cont'd)


ILL. 3



MID PAN

ECONOMIZER TOP PANEL

ILL. 4

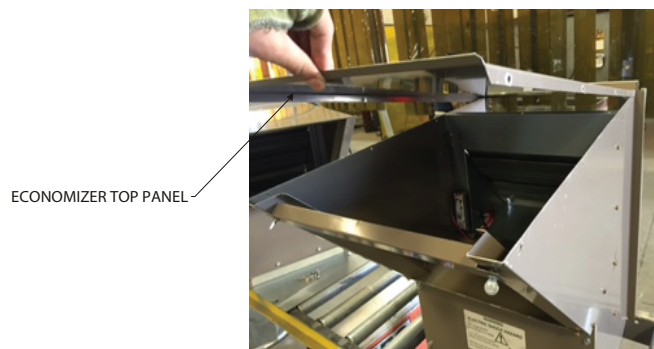

ECONOMIZER TOP PANEL

ILL. 6

FRONT FLANGE




ILL. 5



DUCT COVER

ILL. 7

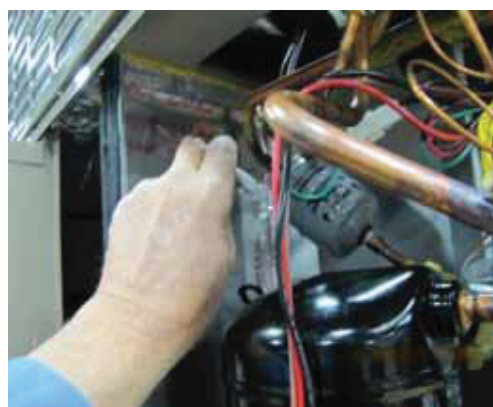

BOTTOM DUCT OPENING

LXL 2 to 5 Ton Units- Vertical Install (cont'd)

ILL. 8



ILL. 9




ILL. 10



10. The discharge air sensor should be mounted on the blower wheel wrap. Use only #8 screws shorter than 1/2" in length to avoid hitting blower wheel.
11. For economizers with optional power exhaust, route the power cord through the unit following step 8 and 9.

For wiring information refer to page 8 in IOM-0014.

ILL. 11

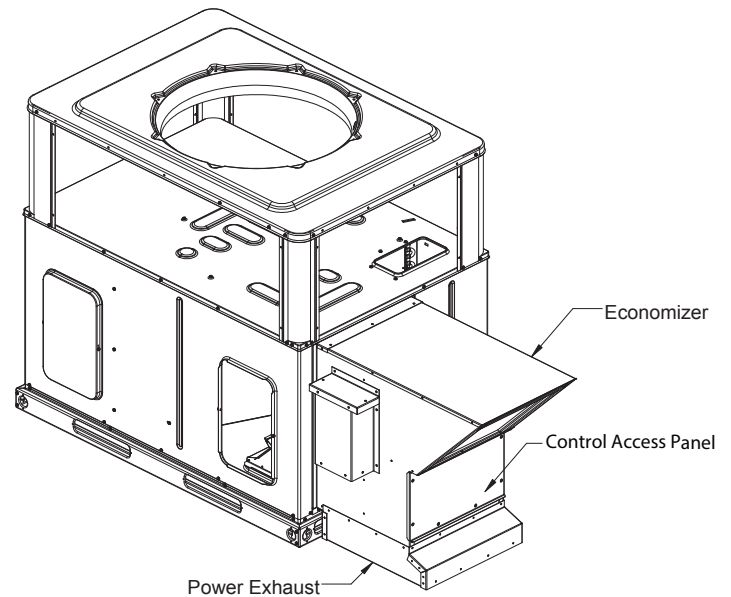

York Economizer Install Notes

Additional Notes

1. Power Supply. Provide disconnect means and overload protection as required.
2. Motor Spring>Returns closed when unit is not running.
3. Ensure that equipment transformer is sized to handle the extra load of the economizer and actuator.
4. When using a heat with defrost feedback, add an isolation relay between O and C. (Field provided and installed).