



Solar HVAC 208/230V | Model "R" 5-Ton Condensing Unit

Part Number

SHRPR- 600*00A000 - **

Unit Type

P - Heat Pump

Voltage (*)

G - 230 VAC 1Φ
H - 230 VAC 3Φ

Options (**)


0 - No Options
D - Condenser Coil Coating (UG)
Y - Start Up
7 - Phase Monitor

Description

A Solar HVAC Residential Unit is more than twice as efficient as a standard residential split unit.

A solar box equipped with chambers lined with specialty reflective film is mounted to the top of the condensing unit. Through a patented process, ambient light is converted to thermal energy which reduces the energy demand on the compressor.

Units come with a 1-year parts warranty and 10 year compressor warranty.

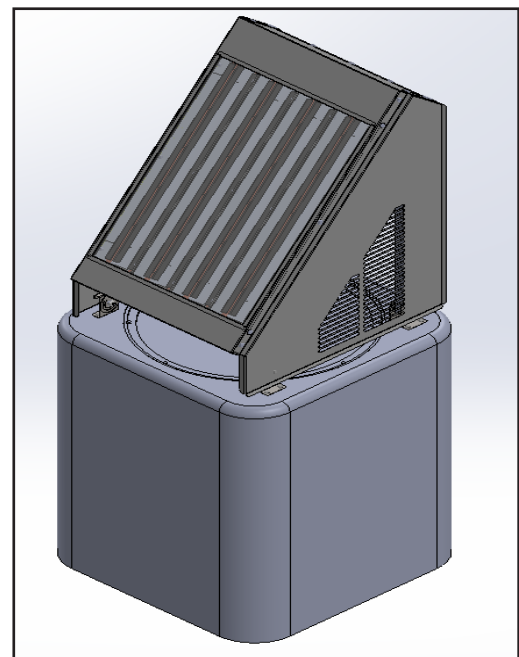




Dimensions

SHRPR-60 | Solar HVAC Model "R" Residential Condenser Dimensions

Model		SHRPR-60 (5 Ton)		(Outdoor Unit) Model		SHRPR-60 (5 Ton)	
Code		Outdoor Code					
Outdoor Power Supply		V/Hz		208-230V/60Hz			
Cooling	Capacity	Btu/h	56500	Outdoor Weight	Net - Lbs (kg)	362 (165)	
		W	3887		*Gross - Lbs (kg)	387 (176)	
	EER	Btu/h, W	11.50		Electrical Data 208/230 1φ	Minimum Circuit Ampacity	36.37 A
SEER		14.00	Max. Overcurrent Protection	60 A			
Heating	Capacity	Btu/h	57000	Electrical Data 208/230 3φ	Minimum Circuit Ampacity	21 A	
	COP	Btu/h.W	3.80		Max. Overcurrent Protection	35 A	
	HSPF		8.20	Outdoor Noise Level (dB(A))		56.3	
Compressor	Type		Scroll	Operation Temperatures (°F)		17 to 125	
Outdoor Dimension	Packing (WxHxD)	Inch	37 1/4 x 37 1/4 x 84 3/4				

Note:
 Unit should be UL 1995 listed
 Unit should be OG-100 Certified to the Solar certification on ICC901/SRCC100

* Gross = Net Weight + Shipping Box
Note: Face solar panels south for optimal performance.
Note: Calculated E COP value with solar panel: 4.11

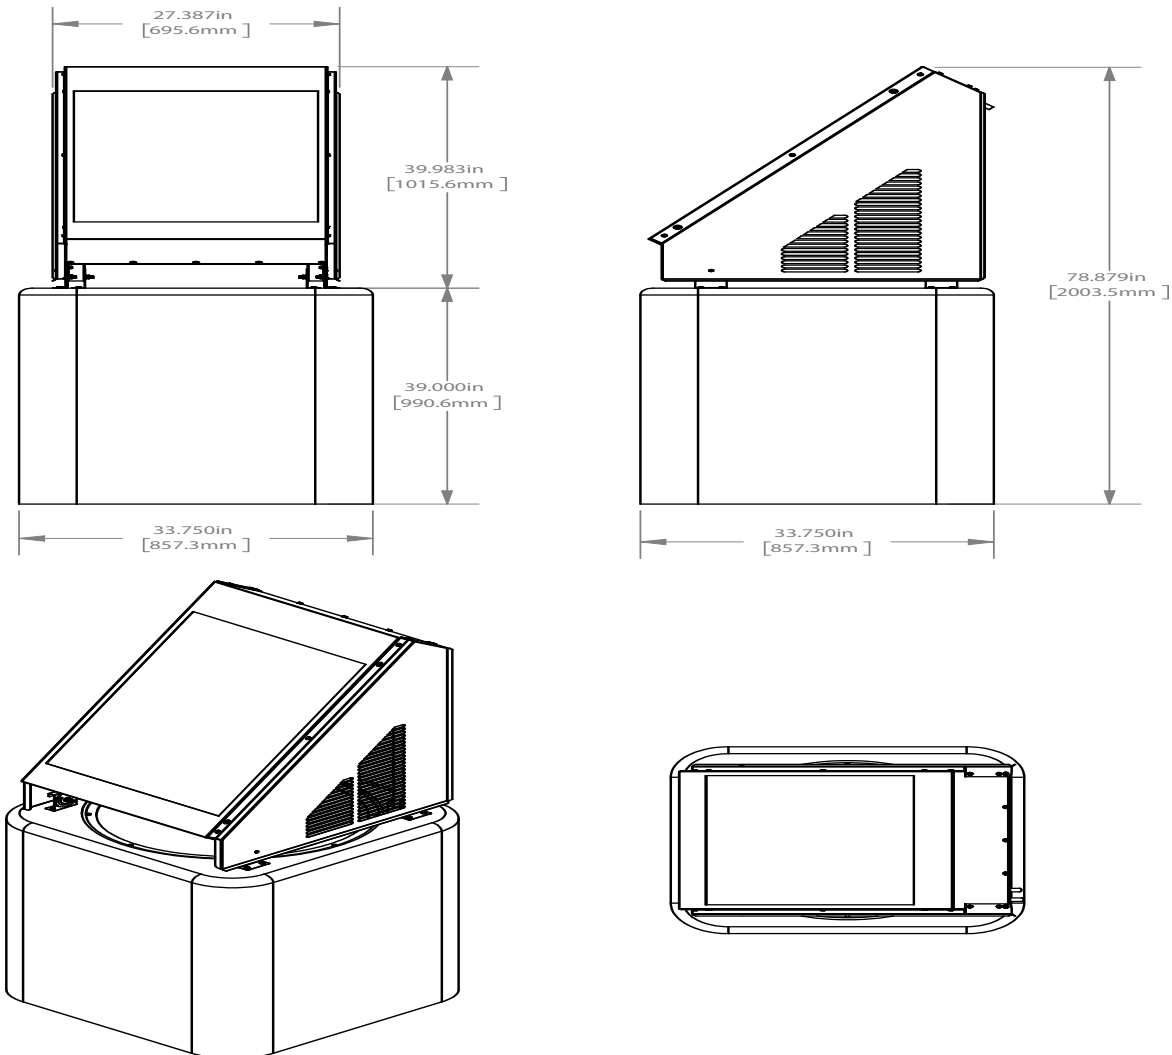

SHRPR-60 | Solar HVAC Model "R" Residential Condenser Clearances

CLEARANCES

