

Product Data

Description

PLEASE NOTE: Our economizer is a low leak, field installed economizer with the iAIRE patented controls packages and actuator, allowing you to reduce the amount of outside air needed from your rooftop HVAC system by up to 2/3 and will improve indoor air quality.

ork Economizer

=C-SCS-***0-*

This reduction in system operation creates on-going utility savings. Payback on capital equipment costs with an iAIRE economizer can be realized in fewer than three years. These packages are designed to work directly on existing rooftop HVAC systems.

These economizers are all low leak and meet the IECC 2015 requirement and are Title 24 compliant by meeting section 120.2(i) for the required controls and the efficiency requirements in 140.4(e).

Unit to RTU Conversion										
SCS12-H SCS34-H										
SCS12-V	ZX 04-07; ZY 04-06; ZQ 04-06; XY 04-06; XQ 04-06; XXA7									
SCS34-V	ZX 08-14; ZY 07-12; XX 08-12; XY 07-09									
SCSHE12-V	ZX 04-07; ZY 04-06; ZQ 04-06; XY 04-06; XQ 04-06; XXA7									
SCSHE34-V	SCSHE34-V ZX 08-14; ZY 07-12; XX 08-12; XY 07-09									
Part Number EC - 1 - 2 3 4 5 - 6										
		26	6075	CHAS12	A-BOX	/ton	PREC810		AFF	SCL34
EC - ECONOM	11ZER	712 1525 3050 Control	100 125 150 s Only	CHAS34 CHAS5 CHAS69 Carrier	B-BOX C-BOX D-BOX E-BOX F-BOX Lennox	PACK13 PREC35 PREC48 PREC610	VOY12 VOY12HE VOY1525H	E	LXS LXL SCS12 SCS34 SCSHE12 SCSHE34 SCL12	
			_						Yc	ork
H - HO			2	0 - A - B -	NO ACTU 20 IN-LB 62 IN-LB 160 IN-LB	ATOR		0 - E A - I	AQ (NO IOI	(

DOMOT		

- 0 NO POWER EXHAUST
- A 208/230V 1Φ FIXED PE B 208/230V 3Φ FIXED PE
- С 460V 3Ф FIXED PE

C - BACNET D - BLDG PRESSURE* R - RTU OPEN

B - HUMIDITY

0 - NONE

U - ULTRA LOW LEAK

Note: By adding option "D" any powered exhaust will be modulating.


options (6)

iAIRE LLC | 2100 Consulate Drive Suite 102, Orlando, FL 32837



Product Data

EC - SCSHE* - VBA0 - * | York Economizer - High Eff.

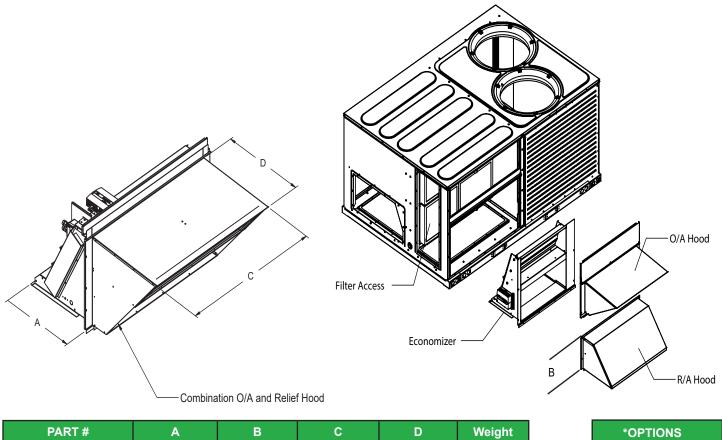

PART #	Α	В	С	D	Weight
EC-SCSHE12-VBA0-*	17 3/16"	18 3/8"	33 1/4"	17 3/8"	81 lbs.
EC-SCSHE34-VBA0-*	19 3/4"	23 7/16"	40 3/4"	22"	108 lbs.

*OPTIONS					
0 - No Options					
B - Humidity/Enthalpic					
C - BACNet					

Electrical Data

PART #	PART	AMPS	PART	AMPS	TOTAL
EC-SCSHE12*	ACTUATOR	.29A	CONTROLS	.27A	.56A
EC-SCSHE34*	ACTUATOR	.29A	CONTROLS	.44A	.73A

Features

· iAIRE Patented Controls Scheme Included

- · Low Leak Damper Included
- · VOC, CO2 and Ionization included
- · Heavy Gauge Galvanized Steel Construction
- · American Sterling Grey Paint Finish
- · One Piece Assembly
- · Gear Driven Dampers
- · Uses HVAC Unit Filter Access Door
- · Capable of Relieving up to 100% of the Outside Air Intake

Economizers with Indoor Air Quality control are Title 24 compliant by meeting section 120.2(i) for the required controls and the efficiency requirements in 140.4(e). They also meet California ozone emissions requirements to be CARB certified.